



# DMP 457

## Pressure Transmitter for Shipbuilding and Offshore

### Stainless Steel Sensor

accuracy according to IEC 61298-2:  
standard: 0.35 % FSO  
option: 0.25 % FSO

#### Nominal pressure

from 0 ... 100 mbar up to 0 ... 600 bar

#### Output signals

2-wire: 4 ... 20 mA  
others on request

#### Special characteristics

- ▶ LR-certificate (Lloyd's Register)
- ▶ DNV-approval (Det Norske Veritas)
- ▶ ABS-certificate (American Bureau of Shipping)
- ▶ CCS-certificate (China Classification Society)
- ▶ flush pressure port  
G 1/2" from 100 mbar
- ▶ excellent thermal behaviour



#### Optional versions

- ▶ IS-version  
Ex ia = intrinsically safe for  
gases and dusts
- ▶ welded pressure port

The pressure transmitter DMP 457 has been especially designed for rough conditions occurring especially in shipbuilding and offshore applications. All gaseous and liquid media, which are compatible with stainless steel 1.4404 (316L) respectively can be used.

Sensor element is a piezoresistive stainless steel sensor with high accuracy and excellent long-term stability. In order to meet the special requirements for shipbuilding and offshore applications extensive tests had to be passed to get the Lloyd's Register (LR), Det Norske Veritas (DNV) and China Classification Society (CCS) approvals.

#### Preferred areas of use are

-  Diesel engines, drives  
Compressors, pumps  
Boiler  
Hydraulic and pneumatic  
control systems
-  Fuel and oil



# DMP 457

Pressure Transmitter for Shipbuilding and Offshore

Technical Data

Input pressure range <sup>1</sup>												
Nominal pressure gauge [bar]	-1 ... 0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6	
Nominal pressure absolute [bar]	-	-	-	-	0.40	0.60	1	1.6	2.5	4	6	
Level gauge / abs. [mH <sub>2</sub> O]	-	1	1.6	2.5	4	6	10	16	25	40	60	
Overpressure [bar]	5	0.5	1	1	2	5	5	10	10	20	40	
Burst pressure ≥ [bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50	

Nominal pressure gauge	[bar]	10	16	25	40	60	100	160	250	400	600
Nominal pressure abs.	[bar]	10	16	25	40	60	100	160	250	400	600
Level gauge / abs.	[mH <sub>2</sub> O]	100	160	250	400	-	-	-	-	-	-
Overpressure	[bar]	40	80	80	105	210	600	600	1000	1000	1000
Burst pressure ≥	[bar]	50	120	120	210	420	1000	1000	1250	-	-
Vacuum resistance		p <sub>N</sub> ≥ 1 bar: unlimited vacuum resistance					p <sub>N</sub> < 1 bar: on request				

<sup>1</sup> from 60 bar: measurement starts with ambient pressure

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / V <sub>S</sub> = 8 ... 32 V <sub>DC</sub>
Option IS-version	2-wire: 4 ... 20 mA / V <sub>S</sub> = 10 ... 28 V <sub>DC</sub>

Performance	
Accuracy <sup>2</sup>	standard: nominal pressure < 0.4 bar: ≤ ± 0.5 % FSO nominal pressure ≥ 0.4 bar: ≤ ± 0.35 % FSO option: nominal pressure ≥ 0.4 bar: ≤ ± 0.25 % FSO
Permissible load	R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S min</sub> ) / 0.02 A] Ω
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ
Long term stability	≤ ± 0.1 % FSO / year by reference conditions
Response time	< 10 msec

<sup>2</sup> accuracy according to IEC 61298-2 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (offset and span)			
Nominal pressure p <sub>N</sub> [bar]	-1 ... 0	< 0.4	≥ 0.40
Tolerance band [% FSO]	≤ ± 0.75	≤ ± 1	≤ ± 0.75
in compensated range [°C]	-20 ... 85	0 ... 70	-20 ... 85

Permissible temperatures	
Medium	-40 ... 125°C
Electronics / environment	-40 ... 85°C
Storage	-40 ... 100°C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to - EN 61326 - DNV (Det Norske Veritas)

Mechanical stability	
Vibration	4 g (according to DNV: class B, curve 2 / basis: IEC 60068-2-6)


Materials	
Pressure port	stainless steel 1.4404 (316L)
Housing	standard: stainless steel 1.4404 (316L) option field housing: stainless steel 1.4404 (316L), with cable gland
Cable sheath	TPE -U (flame-resistant, halogen free, increased resistance against oil and gasoline, resistant against salt, sea water, heavy oil)
Seals (media wetted)	standard: FKM option: welded version <sup>3</sup> others on request
Diaphragm	stainless steel 1.4435 (316L)
Media wetted parts	pressure port, seals, diaphragm

<sup>3</sup> welded version only with pressure ports according to EN 837 and NPT; possible for nominal pressure ranges p<sub>N</sub> ≤ 40 bar

Category of the environment		
Lloyd's Register (LR)	EMV1, EMV2, EMV3, EMV4	number of certificate: 13/20055
Det Norske Veritas (DNV)	temperature: D humidity: B vibration: B electromagnetic compatibility: B enclosure: D	number of certificate: TAA00001GR

Explosion protection			
Approvals DX19-DMP 457	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIB T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da		
Safety technical maximum values	$U_i = 28 \text{ V}$ , $I_i = 93 \text{ mA}$ , $P_i = 660 \text{ mW}$ , $L_i \approx 0 \text{ }\mu\text{H}$ with field housing: $C_i = 105 \text{ nF}$ with cable outlet: $C_i = 84.7 \text{ nF}$ with ISO 4400: $C_i = 62.2 \text{ nF}$ the supply connections have an inner capacity of max. 90 nF (140 nF with field housing) to the housing		
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with $p_{\text{atm}}$ 0.8 bar up to 1.1 bar in zone 1 or higher: -40/-20 ... 70 °C		
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$		
Miscellaneous			
Current consumption	max. 25 mA		
Weight	approx. 140 g (with ISO 4400)		
Installation position	any <sup>4</sup>		
Operational life	100 million load cycles		
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) <sup>5</sup>		
ATEX Directive	2014/34/EU		
<sup>4</sup> Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $p_N \leq 1 \text{ bar}$ . <sup>5</sup> This directive is only valid for devices with maximum permissible overpressure > 200 bar			
Wiring diagram			
2-wire-system (current)			
Pin configuration			
Electrical connection	<div>ISO 4400 </div> <div>field housing (clamp section: 2.5 mm<sup>2</sup>) </div> <div>cable colours (IEC 60757)</div>		
Supply +	1 VS+	WH (white)	
Supply -	2 VS-	BN (brown)	
Shield	ground pin	GND GNYE (green-yellow)	
Electrical connections <sup>6</sup> (dimensions mm / in)			
<div></div> <div></div> <div></div>			
ISO 4400 - Code G10 (IP 65)		ISO 4400 - Code G00 (IP 65)	ISO 4400 - Code G01 (IP 65)
<sup>6</sup> Generally shielded cable has to be used! Cable versions are delivered with shielded cable. For ISO 4400 the use of shielded cable is compulsory.			

## Electrical connections <sup>6</sup> (dimensions mm / in)

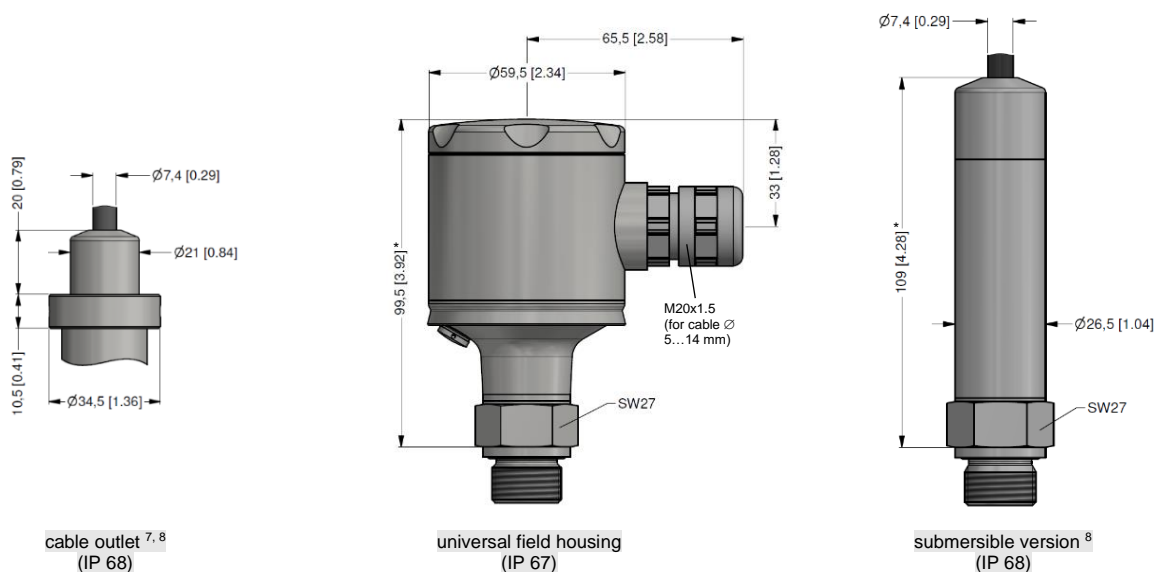


<sup>6</sup> Generally shielded cable has to be used! Cable versions are delivered with shielded cable. For ISO 4400 the use of shielded cable is compulsory.

<sup>7</sup> tested at 4 bar or 40 mH<sub>2</sub>O for 24 hours

<sup>8</sup> shielded cable with integrated air tube for atmospheric reference (for nominal pressure ranges absolute, the air tube is closed); different lengths available

\* total lengths increase by 9 mm for  $p_N \geq 100$  bar with the optional accuracy  $\leq \pm 0.25$  % FSO

## Mechanical connections (dimensions mm / in)

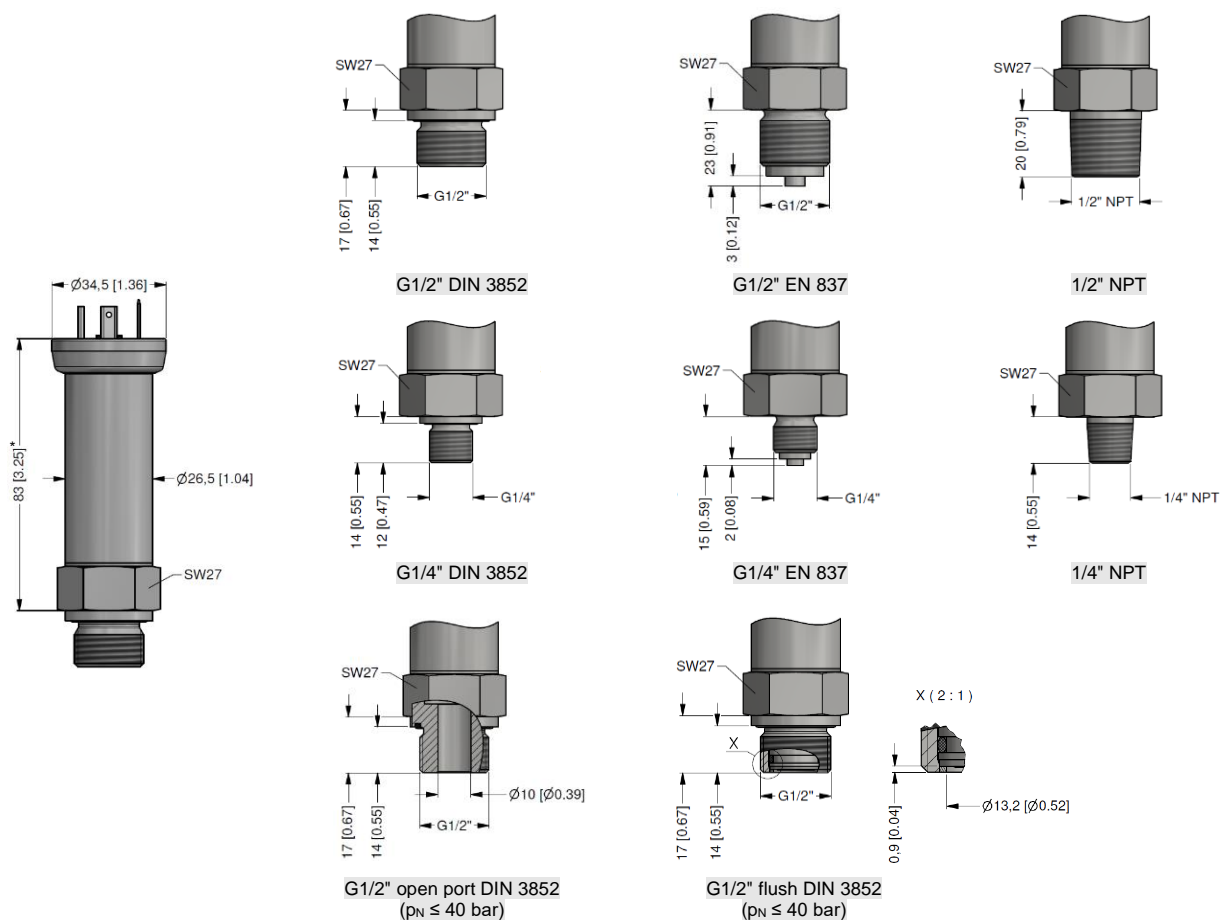

\* total lengths increase by 9 mm for  $p_N \geq 100$  bar with the optional accuracy  $\leq \pm 0.25$  % FSO

© 2025 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DMP 457

DMP 457

□	□	□	-	□	□	□	□	-	□	-	□	-	□	□	□	□
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Pressure					
	in bar, gauge <sup>1</sup>	6	0	0	
	in bar, absolute <sup>2</sup>	6	0	1	
	in mH <sub>2</sub> O, gauge <sup>1</sup>	6	0	2	
	in mH <sub>2</sub> O, absolute <sup>2</sup>	6	0	3	
Input	[mH <sub>2</sub> O]	[bar]			
	1.0	0.10 <sup>2</sup>	1	0	0
	1.6	0.16 <sup>2</sup>	1	6	0
	2.5	0.25 <sup>2</sup>	2	5	0
	4.0	0.40	4	0	0
	6.0	0.60	6	0	0
	10	1.0	1	0	1
	16	1.6	1	6	1
	25	2.5	2	5	1
	40	4.0	4	0	1
	60	6.0	6	0	1
	100	10	1	0	2
	160	16	1	6	2
	250	25	2	5	2
	400	40	4	0	2
		60	6	0	2
		100	1	0	3
		160	1	6	3
		250	2	5	3
		400	4	0	3
		600	6	0	3
	-1 ... 0	X	1	0	2
	customer		9	9	9
Output					
	4 ... 20 mA / 2-wire		1		
	intrinsic safety 4 ... 20 mA / 2-wire		E		
	customer		9		
Accuracy					
standard for p <sub>N</sub> ≥ 0,4 bar:	0.35 % FSO		3		
standard for p <sub>N</sub> < 0,4 bar:	0.50 % FSO		5		
option for p <sub>N</sub> ≥ 0,4 bar:	0.25 % FSO		2		
	customer		9		
Electrical connection					
	male and female plug ISO 4400 (for cable Ø 4...6 mm)		G	1	0
	male and female plug ISO 4400 GL <sup>3</sup> (for cable Ø 10...14 mm)		G	0	0
	male and female plug ISO 4400 GL <sup>3</sup> (for cable Ø 4,5...11 mm)		G	0	1
	cable outlet (TPE-U-cable) <sup>4</sup>		T	R	3
	field housing stainless steel (316L)		8	8	0
	submersible version (1.4404 / 316L)		T	T	3
	with TPE-U-cable <sup>4</sup>				
	customer		9	9	9
Mechanical connection					
	G1/2" DIN 3852		1	0	0
	G1/2" EN 837		2	0	0
	G1/4" DIN 3852		3	0	0
	G1/4" EN 837		4	0	0
	G 1/2" DIN 3852 with flush sensor <sup>5</sup>		F	0	0
	G1/2" DIN 3852 open pressure port <sup>5</sup>		H	0	0
	1/2" NPT		N	0	0
	1/4" NPT		N	4	0
	customer		9	9	9
Seal					
	FKM		1		
	without (welded version) <sup>6</sup>		2		
	customer		9		
Special version					
	standard				
	customer				

<sup>1</sup> from 60 bar: measurement starts with ambient pressure<sup>2</sup> absolute pressure possible from 0.4 bar<sup>3</sup> cable socket is GL-approved<sup>4</sup> shielded TPE-U-cable with ventilation tube available in different lengths<sup>5</sup> only for  $p_N \leq 40$  bar possible

<sup>6</sup> welded version only with pressure ports according to EN 837 and NPT: possible with pressure ranges  $p_N \leq 40$  bar