



DPS 300

Multi Range Differential Pressure Transmitter for Gas and Compressed Air

Silicon Sensor

accuracy according to IEC 61298-2:
0.5% FSO BFSL

Differential pressure

from 0 ... 1.6 mbar up to 0 ... 1000 mbar

Output signals

3-wire: 0 ... 10 V, 0 ... 20 mA
(0 ... 5 V, 4 ... 20 mA switchable)
2-wire: 4 ... 20 mA (optional)

Special characteristics

- ▶ adjustable ranges
- ▶ high overpressure capability
- ▶ adjustable damping
- ▶ compact form

Optional versions

- ▶ LC-display, two-line
- ▶ automatic zero adjustment
- ▶ contacts
(only in combination with display)
- ▶ square root extraction
(only in combination with display)

The pressure transmitter DPS 300 was developed for the differential pressure measuring for dry, non aggressive gases and compressed air and can be used for several HVAC applications

The DPS 300 is a multi range transmitter with up to three adjustable ranges.

The device is equipped with a two-line LC display optionally and can be parameterized simply. Values, status of the contact and the unit are shown on the display.

Preferred applications are



HAVC applications
e.g. air conditioning, clean room
technology, filter monitoring



Medical

Preferred areas of use are



Gas, compressed air



DPS 300

Differential Pressure Transmitter

Technical Data

Input pressure range						
Nominal pressure p _N [mbar] (differential, gauge pressure)	1.6	4	10	40	250	1000
Adjustable to [mbar]	1.0	2.5	6	25	60 / 160	400 / 600
Nominal pressure p _N symmetric ¹ (differential pressure) [mbar]	± 1.6	± 4	± 10	± 40	± 250	± 1000
Max. static pressure [mbar]	200	200	200	345	1000	3000
¹ not possible with square root extraction						
Output signal / Supply						
Standard	3-wire:	switchable on: 0 ... 10 V / 0 ... 20 mA 0 ... 5 V / 4 ... 20 mA with automatic zero adjustment:			V _S = 19 ... 32 V _{DC} V _S = 24 ... 32 V _{DC}	
Option	2-wire:	4 ... 20 mA with automatic zero adjustment:			V _S = 11 ... 32 V _{DC} V _S = 24 ... 32 V _{DC}	
Performance						
Accuracy	for p _N ≥ 6 mbar:	≤ ± 0.5% FSO BFSL				
	for p _N < 6 mbar:	≤ ± 1% FSO BFSL				
Permissible load	voltage 3-wire:	R _{min} = 10 kΩ		current 3-wire: 330 Ω		
	current 2-wire:	R _{max} = [(V _S – V _{S min}) / 0,02 A] Ω				
Influence effects	supply:	0.05 % FSO / 10 V				
	load:	0.05 % FSO / kΩ				
Response time T ₉₀	< 100 msec; adjustable by potentiometer in the range of 0 msec up to 5000 msec					
Turn on time	500 msec					
Long term stability	for p _N < 6 mbar:	≤ ± 0.5% FSO / year at reference conditions				
	for p _N ≥ 6 mbar:	≤ ± 0.2% FSO / year at reference conditions				
Measuring rate	12.5 Hz					
Contact (optional)						
	3-wire version			2-wire version		
Number, form	2 x relay-output (NO/NC)			2 x PNP-open-collector-contact		
switching current	max. 1 A			max. 125 mA resistant; short-circuit-proof		
switching voltage	max. 60 V _{DC} ; max. 40 V _{AC}					
switching capacity	max. 60 W					
Accuracy of switching points	≤ ± 2 % FSO			≤ ± 2 % FSO		
Accuracy of repeatability	≤ ± 0.5 % FSO			≤ ± 0.5 % FSO		
Switching frequency	5 Hz			5 Hz		
Switching cycles	< 100 x 10 ⁶			< 100 x 10 ⁶		
Thermal effects (offset and span)						
Thermal error	for p _N < 6 mbar:	≤ ± 0.5 % FSO / 10 K (typ.)				
	for p _N ≥ 6 mbar:	≤ ± 0.3 % FSO / 10 K (typ.)				
In compensated range	0 ... 50 °C					
Permissible temperatures						
Medium	0 ... 50°C					
Electronics / environment	0 ... 50°C					
Storage	-10 ... 70°C					
Electrical protection						
Short-circuit protection	permanent					
Reverse polarity protection	no damage, but also no function					
Electromagnetic protection	EMC directive: 2014/30/EU emission and immunity according to EN 61326					
Materials						
Pressure port	brass nickel plated					
Housing	ABS					
Sensor	ceramic, silicon, epoxy, RTV					
Media wetted parts	pressure port, PVC / silicone tube, sensor					

Display (optional)																			
Performance	two-line LC-Display, visible range 32.5 x 22.5 mm 5-digit 7-segment-main display, digit size 8 mm, range of indication: ±9999 8-digit 14-segment-additional display, digit size 5 mm 52-segment-bargraph accuracy: 0.1% ±1 digit																		
Functions	<ul style="list-style-type: none">- parameterisation of contacts- selection of units- selection of signal (linear, square root extraction)- cut-off-function (only with square root extraction)- min- / max-value- recalibration- autozeroing- factory setting																		
Miscellaneous																			
Current consumption	2-wire: max. 22 mA 3-wire: max. 30 mA (during automatic zero adjustment: +23 mA)																		
Weight	approx. 200 g																		
Ingress protection	IP 54																		
Installation position	vertical ¹																		
Operational life	100 million load cycles																		
¹ The devices are calibrated in a vertical position with pressure port down. If this position is changed on installation there can be slight deviations in the zero point.																			
Mechanical connections (dimensions in mm)																			
Standard	Ø 6.6 x 11 (for flex. tubes Ø 6)																		
Option	Ø 4.4 x 10 (for flex. tubes Ø 4)																		
Electrical connections (conductor cross-section)																			
Without ferrule	1.5 mm ²																		
With ferrule	1 mm ²																		
Pin configuration																			
Standard	cable gland M16x1.5																		
Electrical connections	<table><tr><td></td><td>3-wire</td><td>2-wire</td></tr><tr><td>supply +</td><td>VS +</td><td>VS +</td></tr><tr><td>supply -</td><td>VS -</td><td>VS -</td></tr><tr><td>signal + (only for 3-wire)</td><td>Iout / Vout</td><td>-</td></tr><tr><td>contact 1</td><td>C1 / NO1 / NC1</td><td>S1</td></tr><tr><td>contact 2</td><td>C2 / NO2 / NC2</td><td>S2</td></tr></table>		3-wire	2-wire	supply +	VS +	VS +	supply -	VS -	VS -	signal + (only for 3-wire)	Iout / Vout	-	contact 1	C1 / NO1 / NC1	S1	contact 2	C2 / NO2 / NC2	S2
	3-wire	2-wire																	
supply +	VS +	VS +																	
supply -	VS -	VS -																	
signal + (only for 3-wire)	Iout / Vout	-																	
contact 1	C1 / NO1 / NC1	S1																	
contact 2	C2 / NO2 / NC2	S2																	
Wiring diagrams																			
<p>3-wire-system (current / voltage)</p>	<p>3-wire-system (current / voltage) with 2 contacts</p>																		
<p>2-wire-system (current)</p>	<p>2-wire-system (current) with 2 contacts</p>																		


DPS 300

Differential Pressure Transmitter


Technical Data

Dimensions (mm / in)

without display

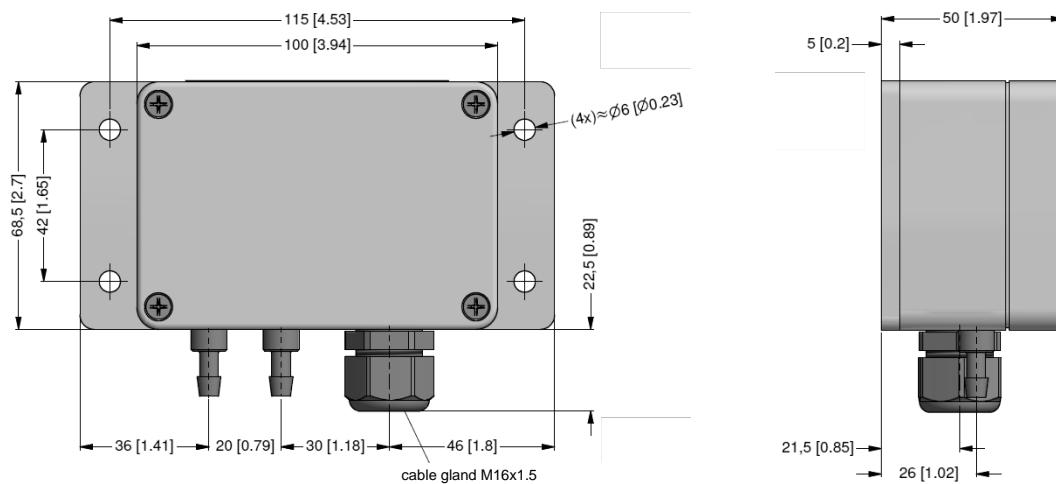

with display

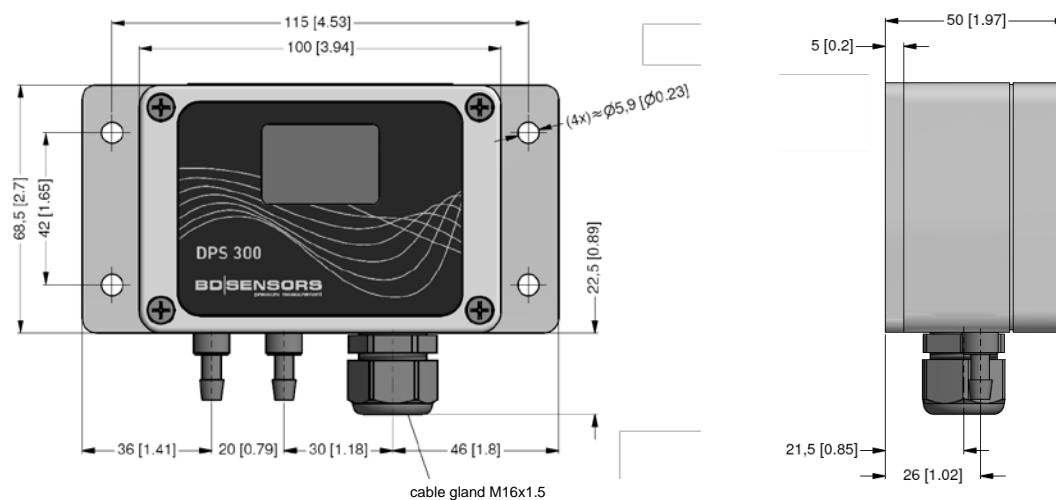

© 2025 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

DPS300_E_140425

Tel.: +49 (0) 92 35 / 98 11- 0
Fax: +49 (0) 92 35 / 98 11- 11

www.bdsensors.de
info@bdsensors.de

BD|SENSORS
pressure measurement

Ordering code DPS 300

DPS 300

□□□-□□□□-□-□-□-□-□□□-□-□□□

Pressure																			
	differential pressure	8	1	5															
	gauge pressure	8	1	6															consult
Input	[mbar]																		
	1.6				0	0	1	6											
	4.0				0	0	4	0											
	10				0	1	0	0											
	40				0	4	0	0											
	250				2	5	0	0											
	1000				1	0	0	1											
	-1.6 ... 1.6				S	1	K	6											
	-4 ... 4				S	0	0	4											
	-10 ... 10				S	0	1	0											
	-40 ... 40				S	0	4	0											
	-250 ... 250				S	2	5	0											
	-1000 ... 1000				S	1	0	2											
	customer				9	9	9	9											consult
Output																			
	3-wire: 0 ... 10 V, 0 ... 20 mA ¹							3Z											
	2-wire: 4 ... 20 mA							1											
	customer							9											consult
contact																			
	without							0											
	2 contacts ²							B											
Accuracy																			
p _N ≥ 6 mbar	0,5 % FSO BFSL							8											
p _N < 6 mbar	1,0 % FSO BFSL							G											
Display																			
	without display							0											
	LC display							C											
	customer							9											consult
Front foil																			
	BD SENSORS							1											
	neutral							N											
	customer							9											consult
Mechanical connection																			
	Ø6.6 x 11 (for flex. tubes Ø6)									Y	0	0							
	Ø4.4 x 10 (for flex. tubes Ø4)									Y	0	2							
										9	9	9							consult
Pressure port																			
	brass nickel plated													M					
	customer													9					consult
Special version																			
	standard															0	0	0	
	automatic zeroing															6	0	0	
	square-root extraction ²															6	0	5	
	customer															9	9	9	consult

¹ output switchable on 0 ... 5 V / 4 ... 20 mA

² only in combination with display and not possible with symmetric nominal pressure