



DS 400

Intelligent Electronic Pressure Switch Stainless Steel

Stainless Steel Sensor

accuracy according to IEC 61298-2:
standard: 0.35 % FSO
option: 0.25 % FSO

Nominal pressure

from 0 ... 100 mbar up to 0 ... 600 bar

Contacts

1 or 2 independent PNP contacts,
freely configurable

Analogue output

2-wire: 4 ... 20 mA

3-wire: 4 ... 20 mA

others on request

Special characteristics

- ▶ indication of measured values on a 4-digit LED display
- ▶ rotatable and configurable display module

Optional versions

- ▶ **IS-version**
Ex ia = intrinsically safe for gases and dust
- ▶ welded pressure sensor
- ▶ customer specific versions

The electronic pressure switch DS 400 is the successful combination of

- ▶ intelligent pressure switch
- ▶ digital display

and has been specially designed for numerous applications in various industrial sectors.

As standard the DS 400 offers a PNP contact and a display module, which is mounted rotatable in the globe housing. Additional optional versions like e.g. an intrinsically safe version, a second contact and an analogue output complete the profile.

Preferred areas of use are



Plant and machine engineering



Heating and air conditioning



Environmental engineering
(water – sewage – recycling)



Input pressure range												
Nominal pressure gauge	[bar]	-1 ... 0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6
Nominal pressure absolute	[bar]	-	-	-	-	0.40	0.60	1	1.6	2.5	4	6
Overpressure	[bar]	5	0.5	1	1	2	5	5	10	10	20	40
Burst pressure	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50

Nominal pressure gauge / absolute	[bar]	10	16	25	40	60	100	160	250	400	600
Overpressure	[bar]	40	80	80	105	210	210	600	1000	1000	1000
Burst pressure	[bar]	50	120	120	210	420	420	1000	1250	1250	1250
Vacuum resistance		$p_N \geq 1$ bar: unlimited vacuum resistance						$p_N < 1$ bar: on request			

Contact ¹	
Number, type	standard: 1 PNP contact option: 2 independent PNP contacts
Max. switching current	contact rating 125 mA, short-circuit resistant; $V_{switch} = V_S - 2V$
Accuracy of contacts ²	$\leq \pm 0.25$ % FSO
Repeatability	$\leq \pm 0.1$ % FSO
Switching frequency	2-wire: max. 10 Hz 3-wire: 50 Hz
Switching cycles	$> 100 \times 10^6$
Delay time	0 ... 100 sec

¹ with IS-protection max. 1 contact possible

Analogue output (optionally) / Supply	
2-wire current signal	4 ... 20 mA / $V_S = 13 \dots 36 V_{DC}$ permissible load: $R_{max} = [(V_S - V_{Smin}) / 0.02 A] \Omega$ response time: < 10 msec
2-wire current signal with IS-protection	4 ... 20 mA / $V_S = 15 \dots 28 V_{DC}$ permissible load: $R_{max} = [(V_S - V_{Smin}) / 0.02 A] \Omega$ response time: < 10 msec
3-wire current signal	4 ... 20 mA / $V_S = 24 V_{DC} \pm 10$ % adjustable (turn-down of span 1:5) ³ permissible load: $R_{max} = 500 \Omega$ response time: < 30 msec
Without analogue output	$V_S = 15 \dots 36 V_{DC}$
Accuracy ²	standard: nominal pressure < 0.4 bar: $\leq \pm 0.50$ % FSO nominal pressure ≥ 0.4 bar: $\leq \pm 0.35$ % FSO option: nominal pressure ≥ 0.4 bar: $\leq \pm 0.25$ % FSO

² accuracy according to IEC 61298-2 – limit point adjustment (non-linearity, hysteresis, repeatability)
³ with turn-down of span the analogue signal is adjusted automatically to the new measuring range

Thermal effects (offset and span)			
Nominal pressure p_N	[bar]	-1 ... 0	< 0.40 ≥ 0.40
Tolerance band	[% FSO]	$\leq \pm 0.75$	$\leq \pm 1$ $\leq \pm 0.75$
In compensated range	[°C]	-20 ... 85	0 ... 70 -20 ... 85

Permissible temperatures	
Medium	-40 ... 125 °C
Electronics / environment	-40 ... 85 °C
Storage	-40 ... 100 °C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
Vibration	20 g RMS / 10 ... 2000 Hz according to DIN EN 60068-2-6
Shock	500 g / 1 msec half sine according to DIN EN 60068-2-27

Materials	
Pressure port	stainless steel 1.4404 (316L)
Housing	stainless steel 1.4301 (304)
Housing cap	standard: plastic HDPE for option IS-protection: stainless steel 1.4301 (304)
Viewing glass	laminated safety glass
Seals (media wetted)	standard: FKM on request: welded version ⁴ and others
Diaphragm	stainless steel 1.4435 (316 L)
Media wetted parts	pressure port, seals, diaphragm

⁴ welded version only for pressure ports according to EN 837 and NPT; possible for nominal pressure ranges $p_N \leq 40$ bar

Explosion protection (only for 4 ... 20 mA / 2-wire)

Approval AX14-DS 400	IBExU 06 ATEX 1050 X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da
Safety techn. maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i \approx 0 \text{ pF}$, $L_i \approx 0 \text{ }\mu\text{H}$
Max. switching current ⁵	70 mA
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p_{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -25 ... 70 °C

⁵ the real switching current in the application depends on the power supply unit

Miscellaneous


Display	4-digit, 7-segment-LED display; visible range 37.2 x 11 mm; digit height 10 mm; range of indication -1999 ... +9999; accuracy 0.1 % $\pm$ 1 digit; digital damping 0.3 ... 30 sec (programmable); measured value update 0.0 ... 10 sec (programmable)
Current consumption (without contacts)	2-wire signal output current: max. 25 mA 3-wire signal output current: approx. 30 mA + signal current
Ingress protection	IP 67
Installation position	any ⁶
Weight	approx. 400 g
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ⁷
ATEX Directive	2014/34/EU

⁶ Pressure switches are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviation in the zero point for pressure ranges $p_N \leq 1 \text{ bar}$.


⁷ This directive is only valid for devices with maximum permissible overpressure > 200 bar.

Wiring diagrams

2-wire-system (current)

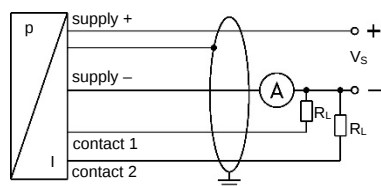


3-wire-system (current)

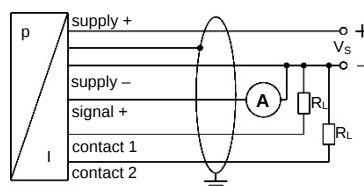

Pin configuration

Electrical connection	M12x1 / metal (5-pin)	
Supply +	1	
Supply -	3	
Signal + (only 3-wire)	2	
Contact 1	4	
Contact 2	5	
Shield	plug housing / pressure port	

Designs ⁸

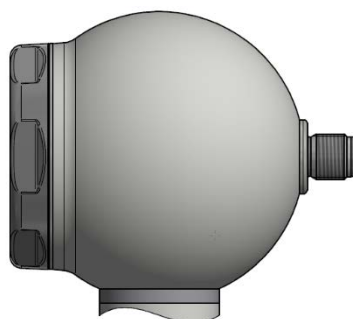


side display



45° display (on request)


⁸ all designs in horizontal rotatable housing as standard

Dimensions (mm / in)

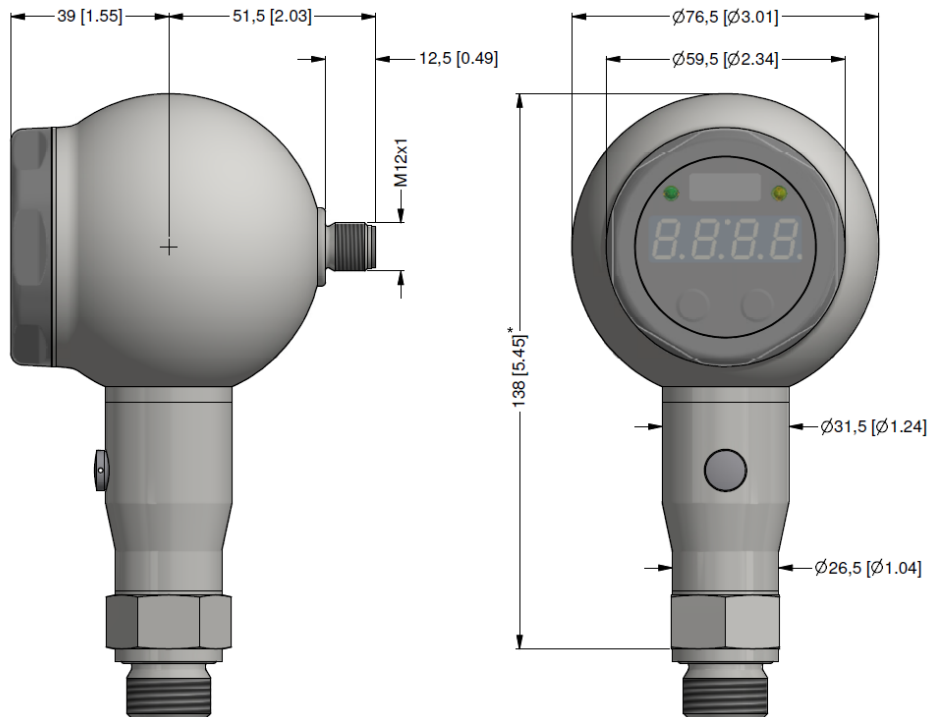

* for nominal pressure $p_N > 400$ bar increases the length of devices without IS-protection by 19 mm

Mechanical connections (dimensions mm / in)

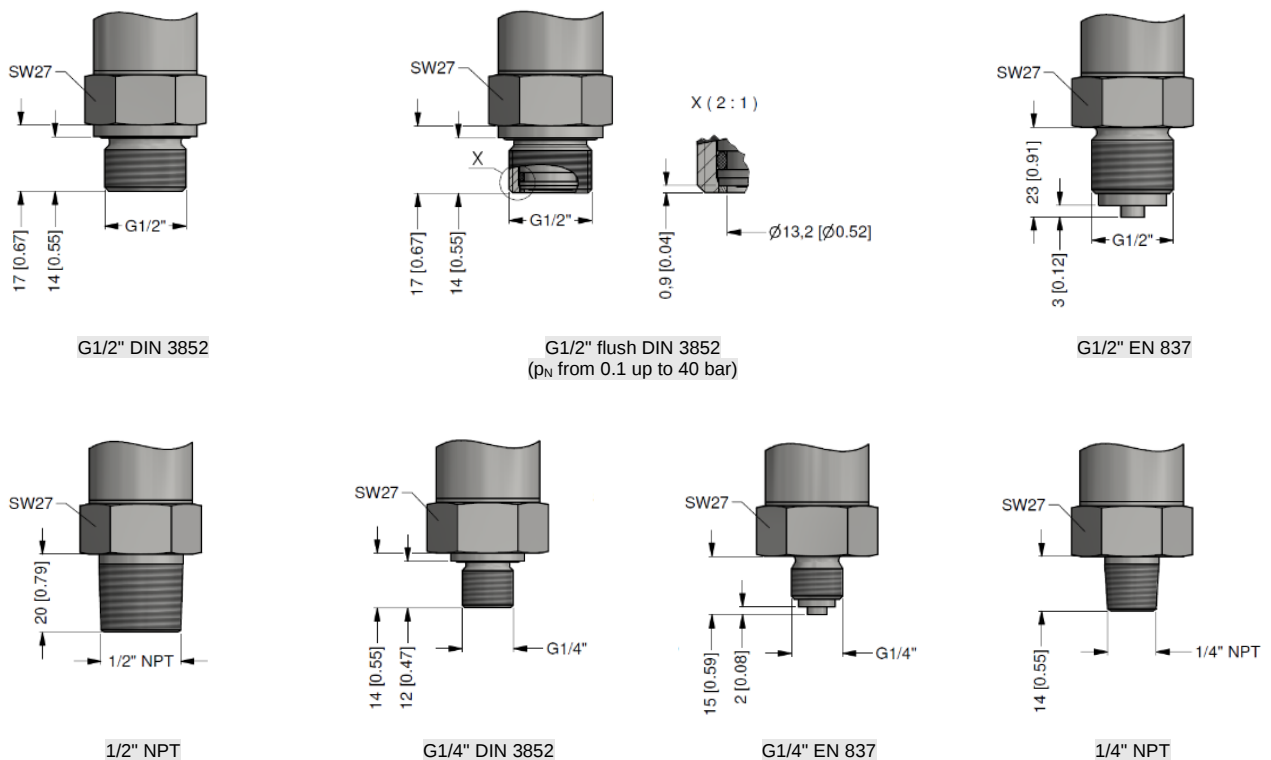

→ metric threads and other versions on request

© 2025 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DS 400

DS 400

□	□	□	-	□	□	□	□	-	□	□	-	□	□	□	-	□	□	□	-	□	□	□	-	□	□	□	-	□	□	□
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

[illegible]¹ from 60 bar: measurement starts with ambient pressure² absolute pressure possible from 0.4 bar

³ with IS version max. 1 contact is possible

⁴ only possible for nominal pressure ranges $p_N \leq 40$ bar

⁵ welded version only with pressure ports according to EN 837 and NPT: possible for nominal pressure ranges $p_N \leq 40$ bar